






Top Access



Minimum of
160 mm from rear
of cistern to front
edge of finished
wall surface

Min. projection
of 10mm - Max.
projection of 80mm
of tile flange box
required prior to
trimming
to accommodate
actuator.

Front Access

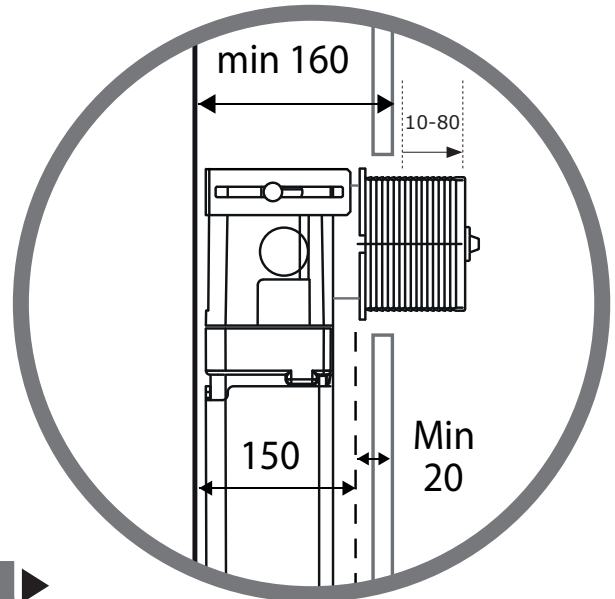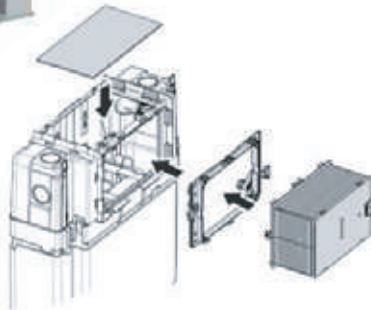

Expert Evo

LOW LEVEL/UNDER BENCH CISTERN + FRAME

CODE

721706/PN

(if used with pneumatic actuators)

721706/MC

(if used with mechanical actuators)

WEIGHT

12 kg


FEATURES

- Dual flush under bench cistern with 4.5/3 litre flush
- Min 150 mm cavity required for installation
- Top or front activation/access
- Supplied with anti-condensation lining
- Brackets for in-wall fixing
- Dust/Tiling protection box
- Protection sponge provided for flush pipe
- Kee seal and pan collar adaptor provided
- 1/2" Flexible hose connection with stop cock
- 10 Year Warranty
- Manufactured in Europe
- Pneumatic actuator included

NOTE

See next page
for compatible
actuators

Minimum thickness
from front of cistern
to the front face of wall
to be at least 20mm

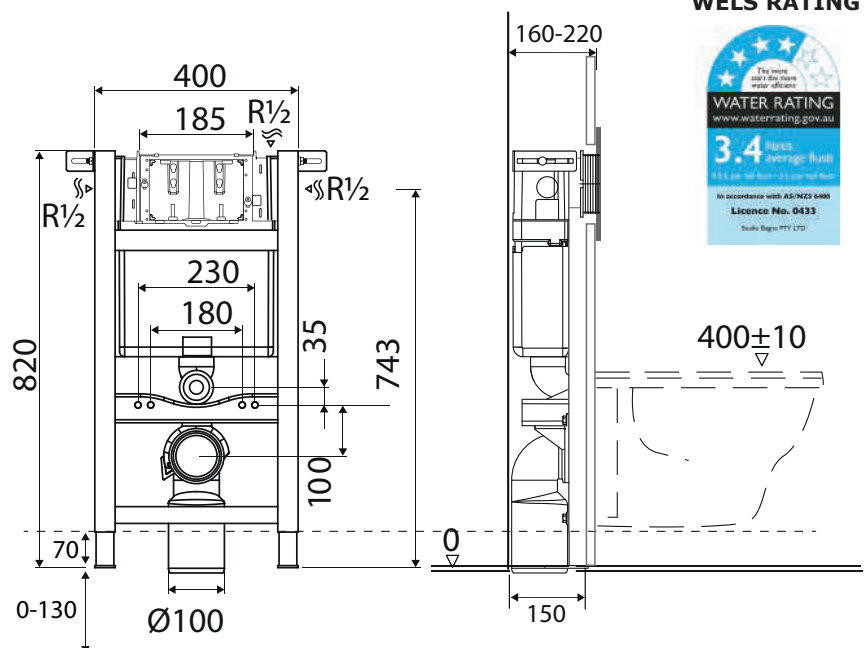

WELS RATING

