

## AXOR Citterio E

Thermostatic module 380/120 for concealed installation for 2 functions with plate

Finish: **Chrome** Article Number: **36703000**



### product features

- 2 functions
- simultaneous utilization of 2 functions
- thermostat cartridge
- flow rate upper outlet: 42 l/min
- flow rate lower outlet: 40 l/min
- maximum flow rate at 3 bar: 42 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- combination of highflow thermostat with shut-off valve and Duo diverter valve for controlling 2 consumers
- Safety stop at 40 °C
- temperature limitation adjustable
- connection dimension: DN20
- connection type: basic set

### Technology




### Certificates / Sustainability



### Product image



### Scale drawing

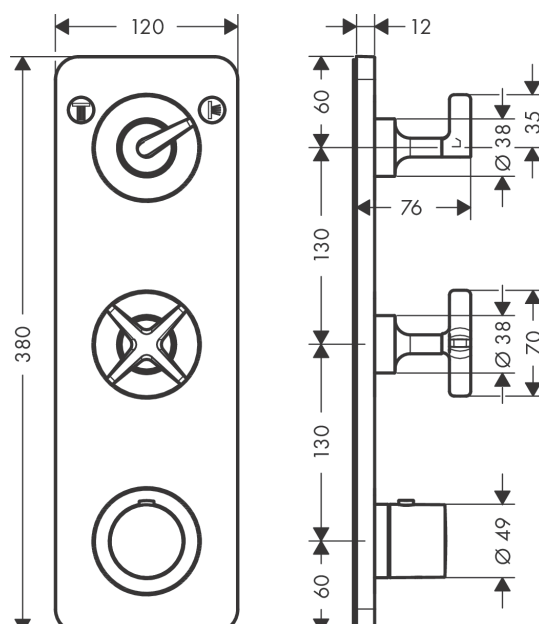



## AXOR Citterio E

Thermostatic module 380/120 for concealed installation for 2 functions with plate

Finish: **Chrome** Article Number: **36703000**



### Flowchart

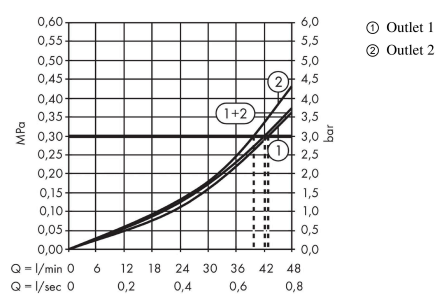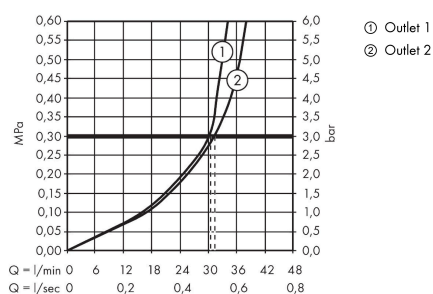

## AXOR Citterio E


Thermostatic module 380/120 for concealed installation for 2 functions with plate

Finish: **Chrome** Article Number: **36703000**



### Exploded Drawing

Year of production: >12/14

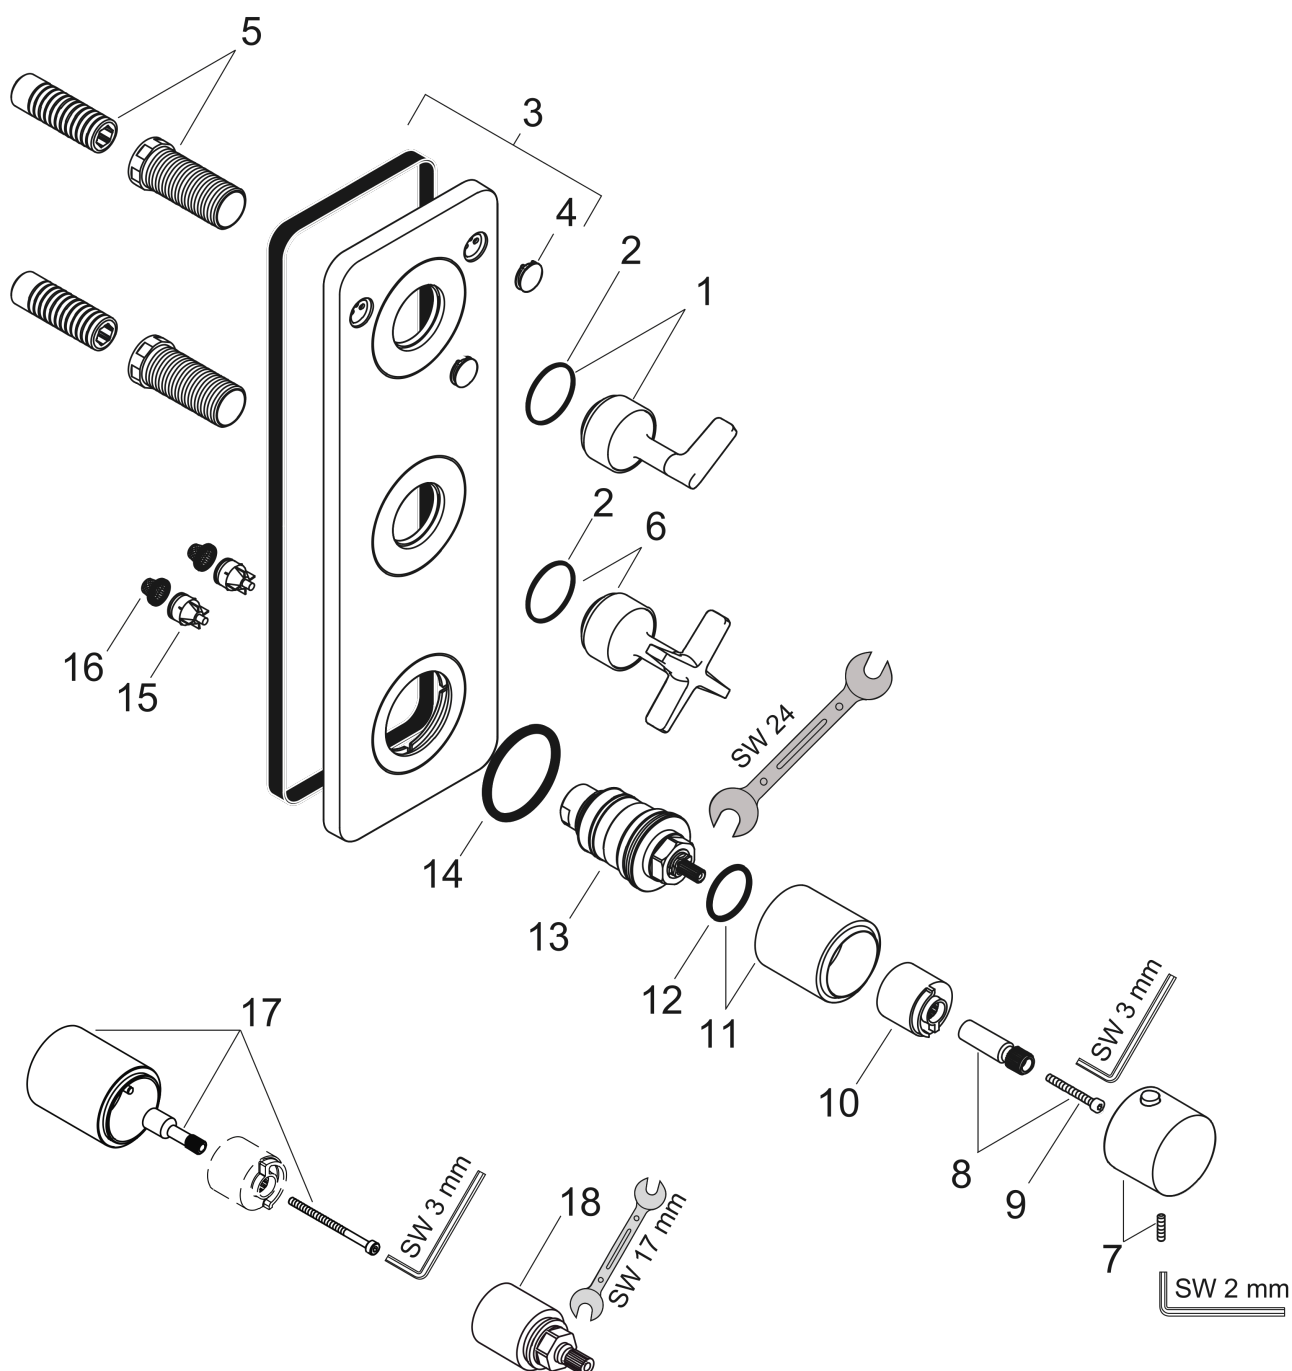

## AXOR Citterio E

Thermostatic module 380/120 for concealed installation for 2 functions with plate

Finish: **Chrome** Article Number: **36703000**



### Spare part list

Year of production: >12/14

Pos.		Article Number	PC	PU
1	handle	92441000	17	1
2	O-ring 30x1,5	98433000	1	1
3	escutcheon	92442000	19	1
4	set of symbols	92541000	14	1
5	fixing set	96393000	8	1
6	handle	92343000	15	1
7	handle for thermostat	92537000	13	1
8	adapter for handle	98701000	3	1
9	hexagon socket screw M4x35	92160000	1	1
10	safety set for temperature control	97334000	4	1
11	sleeve	92669000	13	1
12	O-ring 28x2,5	98209000	1	1
13	thermostat cartridge	96633000	15	1
14	O-ring 48x4	98414000	3	1
15	set of non return valves DW 15	97350000	6	1
16	filter	97973000	5	1
17	extension 25 mm	92670000	16	1
18	extension 25 mm	96370000	99	1
a	base body	36701180	99	1